

USN

--	--	--	--	--	--	--	--	--	--



10EC44

**Fourth Semester B.E. Degree Examination, Dec.2016/Jan.2017**  
**Signals and Systems**

Time: 3 hrs.

Max. Marks:100

**Note: Answer FIVE full questions, selecting at least TWO questions from each part.**

**PART - A**

- 1 a. Determine and sketch the even and odd parts of the signal show in Fig.Q.1(a). (05 Marks)

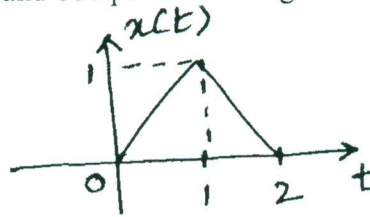


Fig.Q.1(a)

- b. Sketch the waveforms of the following signals:

i)  $x(t) = u(t+1) - 2u(t) + u(t-1)$

ii)  $y(t) = r(t+1) - r(t) + r(t-2)$

iii)  $z(t) = -u(t+3) + 2u(t+1) - 2u(t-1) + u(t-3)$ .

(09 Marks)

- c. For the following system, determine whether the system is: i) Memoryless; ii) Stable; iii) Causal; iv) Linear; v) Time-invariant.

$$y(n) = 2x(n) u(n).$$

(06 Marks)

- 2 a. Derive the equation for convolution sum. (05 Marks)

- b. Evaluate the discrete time convolution sum of

$$y(n) = (1/2)^n u(n-2) * u(n).$$

(05 Marks)

- c. Convolve the signals  $x(t)$  and  $h(t)$  shown below in Fig.Q.2(c). (06 Marks)

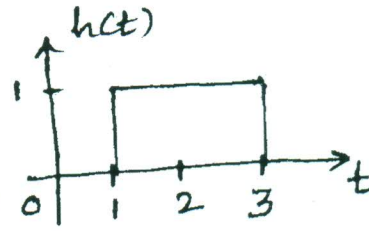
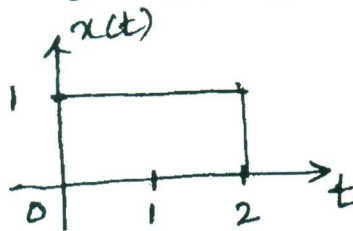


Fig.Q.2(c)

- d. Convolve  $x(n) = \{1, 2, -1, 1\}$  and  $h(n) = \{1, 0, 1\}$ . (04 Marks)

- 3 a. Find the output, given the input and initial conditions, for the system described by the following differential equation:

$$x(t) = e^{-t} u(t), y(0) = -1/2, y'(0) = 1/2, y''(t) + 5y'(t) + 6y(t) = x(t).$$

(07 Marks)

- b. Determine the forced response for the system described by the following difference equation

and the specified input:  $x(n) = 2u(n), y(n) - \frac{9}{16}y(n-2) = x(n-1)$ . (07 Marks)

- c. Draw direct form-I and direct form-II implementations of the system described by the

difference equation:  $y(n) + \frac{1}{4}y(n-1) + \frac{1}{8}y(n-2) = x(n) + x(n-1)$ . (06 Marks)

Important Note : 1. On completing your answers, compulsorily draw diagonal cross lines on the remaining blank pages.  
 2. Any revealing of identification, appeal to evaluator and /or equations written eg. 42+8 = 50, will be treated as malpractice.



- 4 a. Prove the time shift and frequency shift properties of DTFs. (06 Marks)
- b. Determine the DTFS of the signal

$$x(n) = \cos\left(\frac{\pi}{3}\right)n . \quad (06 \text{ Marks})$$

- c. Evaluate the Fourier series representation of the signal  $x(t) = \sin 2\pi t + \cos 3\pi t$ . Also sketch the magnitude and phase spectra. (08 Marks)

**PART - B**

- 5 a. Prove the convolution property of DTFT. (05 Marks)
- b. Find the DTFT of unit step sequence. (07 Marks)
- c. Compute the Fourier transform of the signal

$$x(t) = \begin{cases} 1 + \cos \pi t; & |t| \leq 1 \\ 0; & |t| > 1 \end{cases} \quad (08 \text{ Marks})$$

- 6 a. The impulse response of a continuous time system is given by

$$h(t) = \frac{1}{RC} e^{-t/RC} u(t).$$

Find the frequency response and plot the magnitude and phase response. (05 Marks)

- b. Obtain the FT representation for the periodic signal  $\sin \omega_0 t$  and draw the spectrum. (07 Marks)
- c. Find the DTFT representation for the periodic signal

$$x(n) = \cos\left(\frac{\pi}{3}\right)n$$

Also draw the spectrum. (05 Marks)

- d. Write a note on sampling theorem and Nyquist rate. (03 Marks)

- 7 a. List the properties of region of convergence. (05 Marks)
- b. Determine the Z-transform, the ROC, and the locations of poles and zeros of  $x(z)$  for the following signals: (08 Marks)

$$i) \quad x(n) = -\left(\frac{3}{4}\right)^n u(-n-1) + \left(\frac{-1}{3}\right)^n u(n) \quad ii) \quad x(n) = n \sin\left(\frac{\pi}{2}n\right) u(-n).$$

- c. Find the inverse Z-transform of

$$X(z) = \frac{1 - z^{-1} + z^{-2}}{\left(1 - \frac{1}{2}z^{-1}\right)\left(1 - 2z^{-1}\right)\left(1 - z^{-1}\right)}$$

with following ROCs i)  $1 < |z| < 2$  ii)  $\frac{1}{2} < |z| < 1$ . (07 Marks)

- 8 a. Find the transfer function and impulse response of a causal LTI system if the input to the system is  $x(n) = (-1/3)^n u(n)$  and the output is  $y(n) = 3(-1)^n u(n) + (1/3)^n u(n)$ . (08 Marks)
- b. Determine the transfer function and difference equation representation of an LTI system described by the impulse response  $h(n) = (1/3)^n u(n) + (1/2)^{n-2} u(n-1)$ . (04 Marks)
- c. Determine the forced response, natural response and output of the system described by the difference equation  $y(n) + 3y(n-1) = x(n) + x(n-1)$ , if the input is  $x(n) = \left(\frac{1}{2}\right)^n u(n)$  and  $y(-1) = 2$  is the initial condition. (08 Marks)

\*\*\*\*\*