



USN

--	--	--	--	--	--	--	--	--	--

10ES43

Fourth Semester B.E. Degree Examination, Dec.2016/Jan.2017

Control Systems

Time: 3 hrs.

Max. Marks:100

Note: Answer FIVE full questions, selecting at least TWO questions from each part.

PART - A

- 1 a. A mechanical system is shown in the Fig.Q.1(a).  
 i) Obtain the performance equations.  
 ii) Draw the electrical analog based on force-current analogy. (08 Marks)

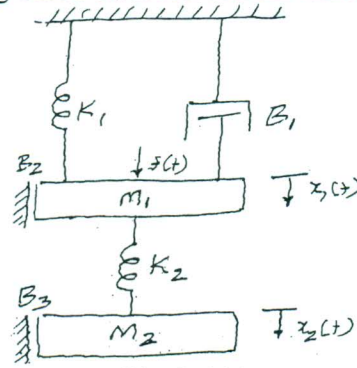


Fig.Q.1(a)

- b. For the mechanical system shown in Fig.Q.1(b), draw the electrical network based on torque current analogy. Write the performance equations. (08 Marks)

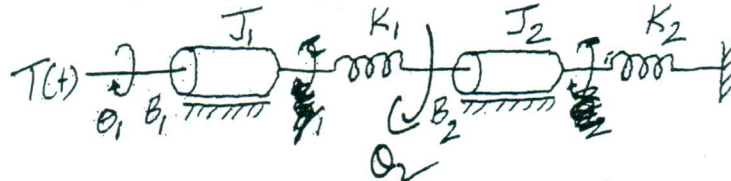


Fig.Q.1(b)

- c. Write an explanatory note on gear trains. (04 Marks)
- 2 a. Define the term transfer function of a linear time invariant system. Derive the expression for the transfer function of a closed loop negative feedback system. (06 Marks)
- b. For the block diagram shown in the Fig.Q.2(b), determine the overall transfer function using block diagram reduction rules. (06 Marks)

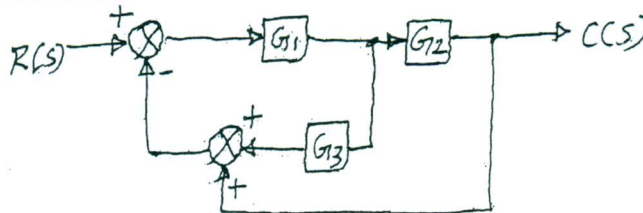


Fig.Q.2(b)

Important Note : 1. On completing your answers, Compulsorily draw diagonal cross lines on the remaining blank pages. 2. Any revealing of identification, appeal to evaluator and/or equations written eg. 42+8 = 50, will be treated as malpractice.



10ES43

- c. Consider the electrical circuit shown in Fig.Q.2(c). Find  $\frac{V_o(s)}{V_i(s)}$  using Mason's gain formula.

(08 Marks)

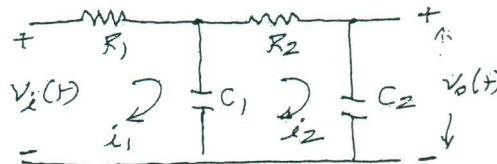


Fig.Q.2(c)

- 3 a. Define the following terms with respect to an underdamped second order system:  
i) Peak time; ii) Settling time; iii) Steady state error. (06 Marks)
- b. A unity feedback system is characterized by an open loop transfer function  $G(s) = \frac{K}{s(s+10)}$ . Determine the gain K so that the system will have a damping ratio of 0.5. For this value of K, determine settling time, peak overshoot and time to peak overshoot for a unit step input. (08 Marks)
- c. For a unity feedback system whose open loop transfer function is  $G(s) = \frac{50}{(1+0.1s)(1+2s)}$ . Find the error constants  $K_p, K_v, K_a$ . (06 Marks)
- 4 a. State the Routh's stability criterion and mention its limitation. (04 Marks)
- b. Consider the characteristic equation  $s^6 + 2s^5 + 8s^4 + 12s^3 + 20s^2 + 16s + 16 = 0$ . Using Routh's criterion, determine the stability of the system. (08 Marks)
- c. The closed loop system shown in Fig.Q.4(c) has  $G(s) = \frac{K(s+30)}{s(s+5)}$  and  $H(s) = \frac{1}{(s+15)}$ . Find the range of K for which system is stable. (08 Marks)



Fig.Q.4(c)


**PART - B**

- 5 a. Discuss the various rules for construction of root loci. (08 Marks)
- b. A negative feedback control system is characterized by  $G(s)H(s) = \frac{K}{s(s+1)(s+2)(s+3)}$ . Sketch the root locus plot for values of K ranging from 0 to  $\infty$ , Mark all the salient points on the root locus. (12 Marks)
- 6 a. Discuss the procedure to evaluate Gain margin and phase margin using Bode plots. (06 Marks)
- b. Sketch the Bode plot for the transfer function  $G(s) = \frac{Ks^2}{(1+0.2s)(1+0.02s)}$ . Determine the system gain K for the gain cross over frequency to be 5 rad/sec. (08 Marks)



10ES43

- c. For the Bode magnitude asymptotic plot of Fig.Q.6(c), determine the transfer function in frequency domain. (06 Marks)

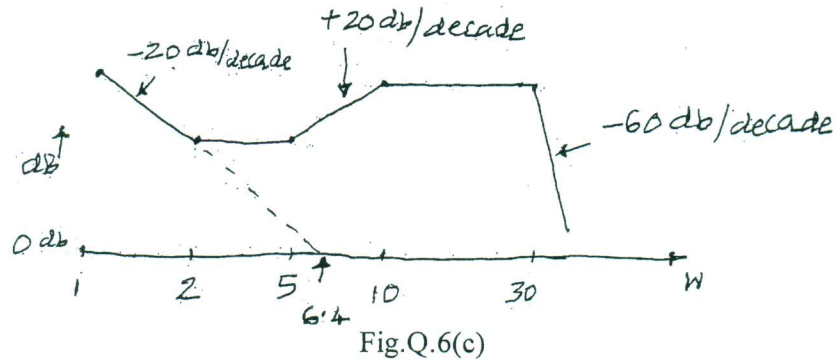

- 7 a. State the Nyquist stability criterion. (06 Marks)  
 b. Using the Nyquist stability criterion, investigate the stability of a closed loop system whose open loop transfer function is given by  $G(s)H(s) = \frac{K}{(s+1)(s+2)}$ . (14 Marks)

- 8 a. State the properties of state transition matrix. (04 Marks)  
 b. Represent the electrical circuit shown in Fig.Q.8(b) by a state model. (08 Marks)


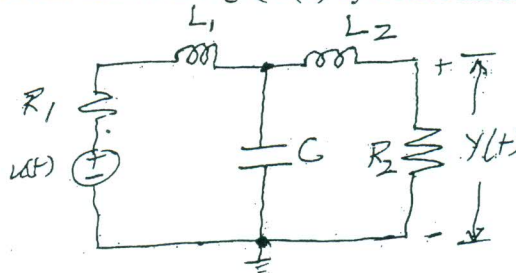


Fig.Q.8(b)

- c. For the signal flow graph of Fig.Q.8(c) write the state and output equations: (08 Marks)

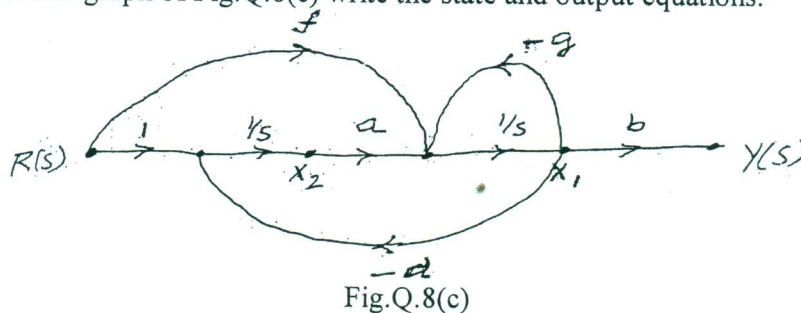

\*\*\*\*\*