



USN

--	--	--	--	--	--	--	--	--	--

10EC/TE61

Sixth Semester B.E. Degree Examination, Dec.2015/Jan.2016 Digital Communication

Time: 3 hrs.

Max. Marks:100

Note: Answer FIVE full questions, selecting at least TWO questions from each part.

PART – A

- 1 a. With neat sketches explain flat top sampling. (07 Marks)
 b. What is Aperture effect? Explain how it can be compensated. (05 Marks)
 c. A signal $g(t) = 10 \cos(20\pi t) \cos(200\pi t)$ is sampled at the rate of 250 samples/sec.
 i) Sketch spectrum of sampled signal.
 ii) Specify the cutoff of ideal reconstruction filter so as to recover $g(t)$ from $g_s(t)$. (08 Marks)

- 2 a. Explain the block diagram of regenerative repeater. (05 Marks)
 b. A PCM system uses a uniform quantizer followed by a v bit encoder. Show that rms signal to quantization noise ratio is approximately given by $(1.8 + 6v)$ db. (06 Marks)
 c. With neat sketch explain companding in PCM. Also explain μ -law and A-law companding. (09 Marks)

- 3 a. Explain the following with neat sketch:
 i) Slope overload distortion.
 ii) Granular noise. (05 Marks)
 b. A delta modulator is designed to operate at five times the Nyquist rate for a signal with 3 kHz bandwidth. Determine the maximum amplitude of a 2 kHz I/P sinusoid for which delta modulator does not have slope overload. Quantizing step size is 250 mV. (05 Marks)
 c. For the binary bit stream 10011011 draw the waveforms for the following cases:
 i) Polar NRZ ii) Manchester RZ iii) Gray code NRZ (05 Marks)
 d. With neat sketch explain power spectra of discrete PAM signals. (05 Marks)

- 4 a. What is ISI? Derive an expression for Nyquist pulse shaping criterion for distortionless base band binary transmission. (06 Marks)
 b. What is correlative coding? Explain duobinary coding with and without precoding. (06 Marks)
 c. The binary data 011100101 are applied to the I/P of a modified duo binary system.
 i) Construct modified duo binary coder O/P without precoder.
 ii) Suppose that due to error in transmission, the level produced by the third digit is reduced to zero. Construct a new receiver output. (08 Marks)

PART – B

- 5 a. With neat block diagram, explain the DPSK transmitter and receiver. (08 Marks)
 b. Obtain the expression for probability of symbol error of coherent binary FSK. (07 Marks)
 c. Binary data are transmitted over a microwave link at the rate of 10^6 bps and the PSD of the noise at the receiver input is 10^{-10} W/Hz. Find the average carrier power required to maintain an average prob. of error $P_e \leq 10^{-4}$ for coherent binary FSK. What is the required channel B.W? (Take $\text{erfc}(3.71) = 10^{-4}$) (05 Marks)

Important Note : 1. On completing your answers, carefully draw diagonal cross lines on the remaining blank pages. 2. Any revealing of identification, appeal to evaluator and /or equations written eg, 42+8 = 50, will be treated as malpractice.



- 6 a. Explain the Gram Schmidt orthogonalization procedure to obtain the orthonormal basis function for linearly independent set of signals. (12 Marks)
- b. Three signals $S_1(t)$, $S_2(t)$ and $S_3(t)$ are as shown in Fig. Q6 (b). Apply Gram Schmidt procedure to obtain an orthonormal basis for the signals. Express the signals $S_1(t)$, $S_2(t)$ and $S_3(t)$ in terms of orthonormal basis functions. Also give signal constellation diagram. (08 Marks)

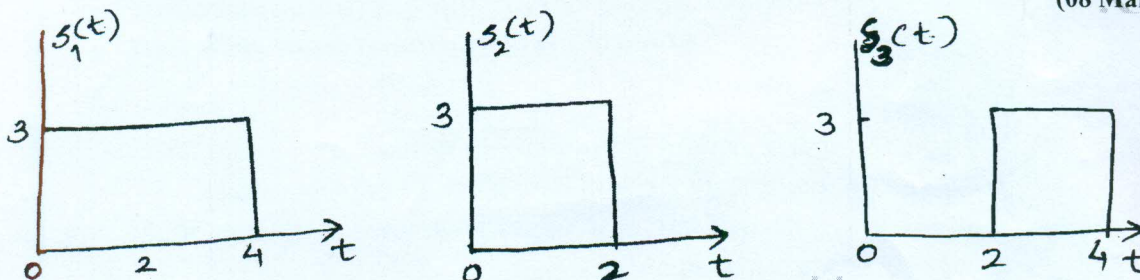


Fig. Q6 (b)

- 7 a. Show that the output SNR of a matched filter is proportional to ratio of signal energy to PSD of input noise. (06 Marks)
- b. Explain the function of correlation receiver. (06 Marks)
- c. Determine the impulse response of matched filter. (08 Marks)
- 8 a. Explain properties of PN sequence (max length sequence). (06 Marks)
- b. Explain the working of direct sequence spread spectrum transmitter and receiver with BPSK. (08 Marks)
- c. The direct sequence spread spectrum communication system has following parameters:
Data sequence bit duration $T_b = 4.095$ ms, PN chip duration $T_c = 1$ μ s.
 $\frac{E_b}{N_0} = 10$ for average probability of error less than 10^{-5} .
Calculate processing gain and jamming margin. Also find jamming margin in db. (06 Marks)
