



USN

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

**Eighth Semester B.E. Degree Examination, June/July 2017**

**Control Engineering**

Time: 3 hrs.

Max. Marks: 100

Note: Answer FIVE full questions, selecting at least TWO questions from each part.

**PART - A**

- 1 a. Define control system. Compare open loop and closed loop control system with an example for each type. (08 Marks)
- b. What are the ideal requirements of control system? (06 Marks)
- c. Draw the block diagram of proportional plus integral plus derivative controller and state its characteristics. (06 Marks)
  
- 2 a. Write the differential equations governing the behaviour of the mechanical system shown in Fig.Q2(a). Also obtain the analogous electrical circuit based on force voltage analogy and loop equations.

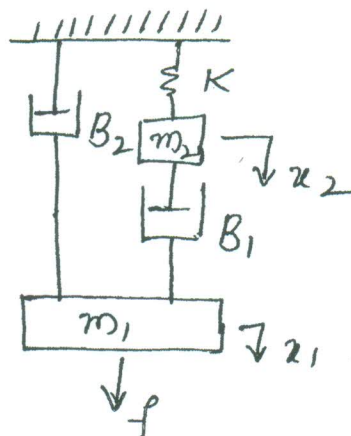


Fig.Q2(a)

(10 Marks)

- b. Obtain the transfer function of field controlled DC motor. (10 Marks)

- 3 a. Reduce the block diagram shown in Fig.Q3(a) and obtain the transfer function  $\frac{C(s)}{R(s)}$ .

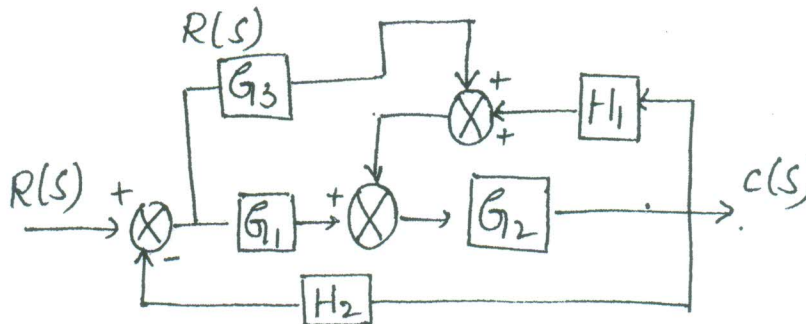


Fig.Q3(a)

(10 Marks)

Important Note : 1. On completing your answers, compulsorily draw diagonal cross lines on the remaining blank pages.  
2. Any revealing of identification, appeal to evaluator and /or equations written eg. 42+8 = 50, will be treated as malpractice.

- b. Find the transfer function by using Mason's gain formula for the signal flow graph shown in Fig.Q3(b).

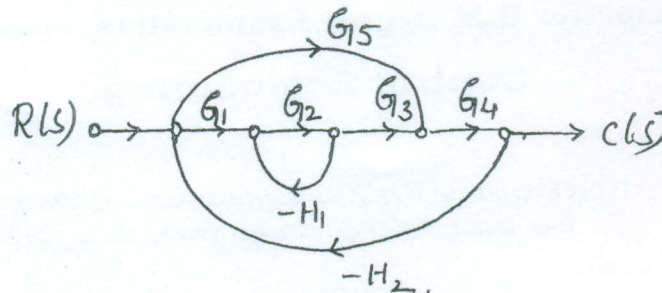


Fig.Q3(b)

(10 Marks)

- 4 a. A units feedback system characterized by an open loop transfer function

$$G(s) = \frac{10}{s^2 + 2s + 6}$$

Determine the following, when the system is subjected to a unit step input:

- i) Undamped natural frequency
  - ii) Damping ratio
  - iii) Peak overshoot
  - iv) Peak time
  - v) Settling time
- (10 Marks)
- b. Explain Routh Hurwitz criterion for stability of a control system and examine the stability of  $s^4 + 2s^3 + 3s^2 + 8s + 2 = 0$  using the same.
- (10 Marks)

**PART - B**

- 5 a. Sketch the polar plot for the transfer function  $G(s) = \frac{10}{s(s+1)(s+2)}$ .
- (10 Marks)

- b. Plot the Nyquist diagram for the open loop transfer function

$$G(s)H(s) = \frac{12}{s(s+1)(s+2)}$$

and determine the nature of stability.

(10 Marks)

- 6 Sketch the bode plot for a unity feed-back system, whose open loop transfer function is given by  $G(s)H(s) = \frac{10}{s(1+s)(1+0.02s)}$ , find:

- i) Gain and phase cross over frequencies.
  - ii) Gain and phase margin.
  - iii) Stability of the closed loop system.
- (20 Marks)

- 7 Sketch the root locus plot for the system whose open loop transfer function is given by

$$G(s)H(s) = \frac{K}{s(s+2)(s^2 + 8s + 20)}$$

(20 Marks)

- 8 a. Explain the following:

- i) Lead compensator
  - ii) Lag compensator
- (10 Marks)

- b. Explain the series and feedback compensated system, with block diagrams.
- (10 Marks)

\*\*\*\*\*